

G 型微通换热器系列产品技术参数表

G Type Microchannel Heat Exchanger Parameter


型号	换热量 (Kw)	风机规格 (mm)	风量总风量 (m ³ /h)	进气管 (mm)	出液管 (mm)	L	H	W	L1	W1
GSWTD-9	9	∅450	3700	∅12.7	∅9.52	1039	602	425	610	385
GSWTD-11	11	∅450	3700	∅12.7	∅9.52	1039	708	425	610	385
GSWTD-15	15	∅400*2	6600	∅15.88	∅12.7	1039	954	425	610	385
GSWTD-17	17	∅450*2	7400	∅15.88	∅12.7	1039	1054	425	610	385
GSWTD-20	20	∅450*2	7400	∅19	∅15.88	1039	1154	425	610	385
GSWTD-23	23	∅450*2	7400	∅22	∅19	1039	1154	425	610	385

冷凝温度：45°C
Condensing Temp.:45°C

环境温度：32°C
Ambient Air Temp.:32°C

过冷度：5°C
Sub-cooling Temp.:5°C

V型一体机微通道换热器 V Type Microchannel Heat Exchanger

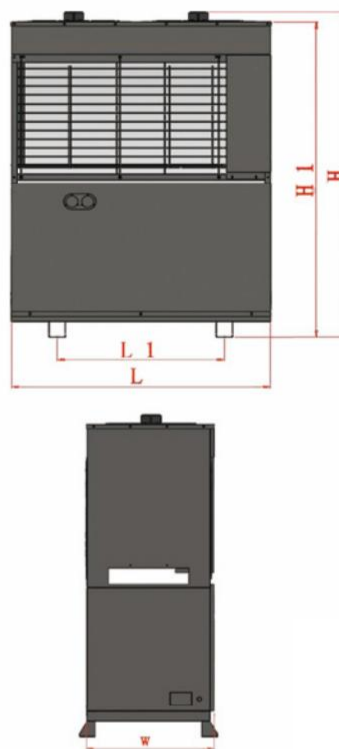

V型微通道换热器系列产品技术参数表

V Type Microchannel Heat Exchanger Parameter

型号 Model	换热量(Kw) Heat Transfer	风量(m ³ /h) Air Flow	风机规格(mm) Fan Motor	功率(w) Power	进气管 Inlet (mm)	出液管 Outlet (mm)	安装尺寸 Installation Dimension(mm)				
							L	H	W	L1	H1
VSWTD-50	50	17440	550x2	1200	32	25	1320	1950	700	815	1860
VSWTD-58	58	21640	600x2	1560	32	25	1410	1950	700	905	1860
VSWTD-70	70	24400	630x2	1600	32	28	1600	2030	700	1095	1940
VSWTD-94	94	32460	600x3	2340	42	28	2020	2030	700	1513	1940
VSWTD-115	115	36600	630x3	2400	42	28	2320	2030	700	1815	1940

冷凝温度: 45°C

Condensing Temp.: 45°C

环境温度: 32°C

Ambient Air Temp.: 32°C

过冷度: 5°C

Sub-cooling Temp.: 5°C